


A0022: Joba Bean Flip-Up 24"

Part #		Description
S0012		Handle, Flip-Up (A)
\$12.50		
S0031		Pull Rope (B)
\$3.75		
S0007		Basket Flip-Up (C)
\$22.00		
S0017		Wheel Shaft - Graphite 23 7/8" (D)
\$6.40		
S0016		Stability Bar (E)
\$8.50		
S0015		Basket Support Bar (F)
\$3.25		
F0021		Disk - 9 1/4" (G)
\$4.75		
F0022		Side Brackets (H)
\$10.50		
F0033		Joba Bean Wheel - Blue (I)
\$12.50		
S0111		Pack of 10 Snap on Spacer - 1/8" (F0026) (J)
\$1.00		
F0030		Joba Finger (K)
\$1.50		
S0105		Pack of ABS Washers and Pins (5-F0013, 3-F0014 and 8-F0015) (L)
\$2.50		
P2512		Basket Shaft 25 1/2" (M)
\$6.50		
S0110		Pack of Dowel Pins ABS (10 each of 1" and 1.25")
\$1.50		
S0052		Mesh Liner
\$12.50		

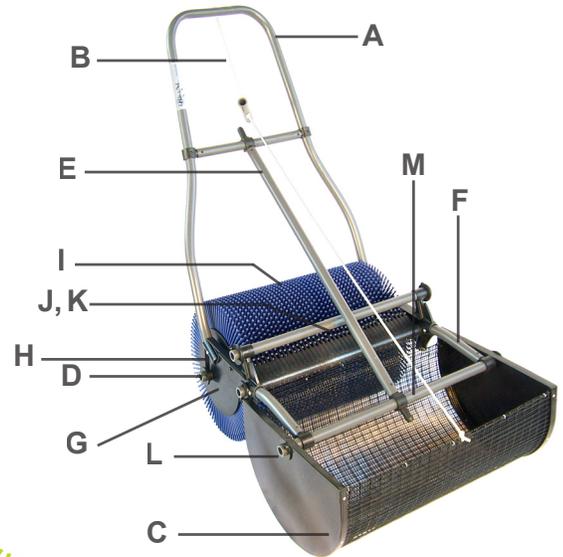

To Assemble:

1. Remove screws from handle (A).
2. Insert handle into both side brackets (H). Be sure the curve at the bottom of the handle is turned up.
3. Reinsert screws into the pre-drilled holes.
4. Remove the 4 screws, washers and pins (L) from the basket shaft (M).
5. Slide basket support bars (F) off of pipe (M).
6. Slide the basket shaft (M) through the holes on the sides of the basket (C) and through the fittings on the basket support bars (F) making sure the downward bend is pointing to the bent and clipped side of the basket. Make sure the fittings are on the inside of the basket.
7. Replace the washers and pins (L). You may need to push down on the side of the basket to bring the holes in the pipe into sight in order to insert pin.
8. Attach basket to assembled head at front of side bracket (H) making sure that (F) is pointing down. Insert screws into the pre-drilled holes.
9. Attach the stability bar (E) and then attach the pull rope (B) by tying it to the top center edge of the basket.

** Assembly videos can be emailed upon request **

Additional Info

- Actual pick up area is 19"
- The Bag-A-Nut will pick up nuts rolling forward or backward, but nuts will only be ejected into the basket while moving forward.
- To empty the basket, pull the attached Pull Rope (B), and the basket will flip up and dump out the nuts.
- Satisfaction guaranteed; all parts are warranted from manufacturer's defects for one year from the date of purchase.
- Standard shipping charges will be added to order.

** Tools needed: hammer and #2 phillips screw driver **